



# CONCRETE WASHOUT SYSTEM

Recovery of sellable aggregate from ready-mix trucks.




RECYCLED MATERIAL IS NEW PROFIT

## APPLICATIONS

- » Recover sand from ready-mix trucks
- » Avoid wasteful disposal
- » Eliminate trips to disposal site
- » Reduce washdown time
- » Multiple trucks discharge at once

## FEATURES

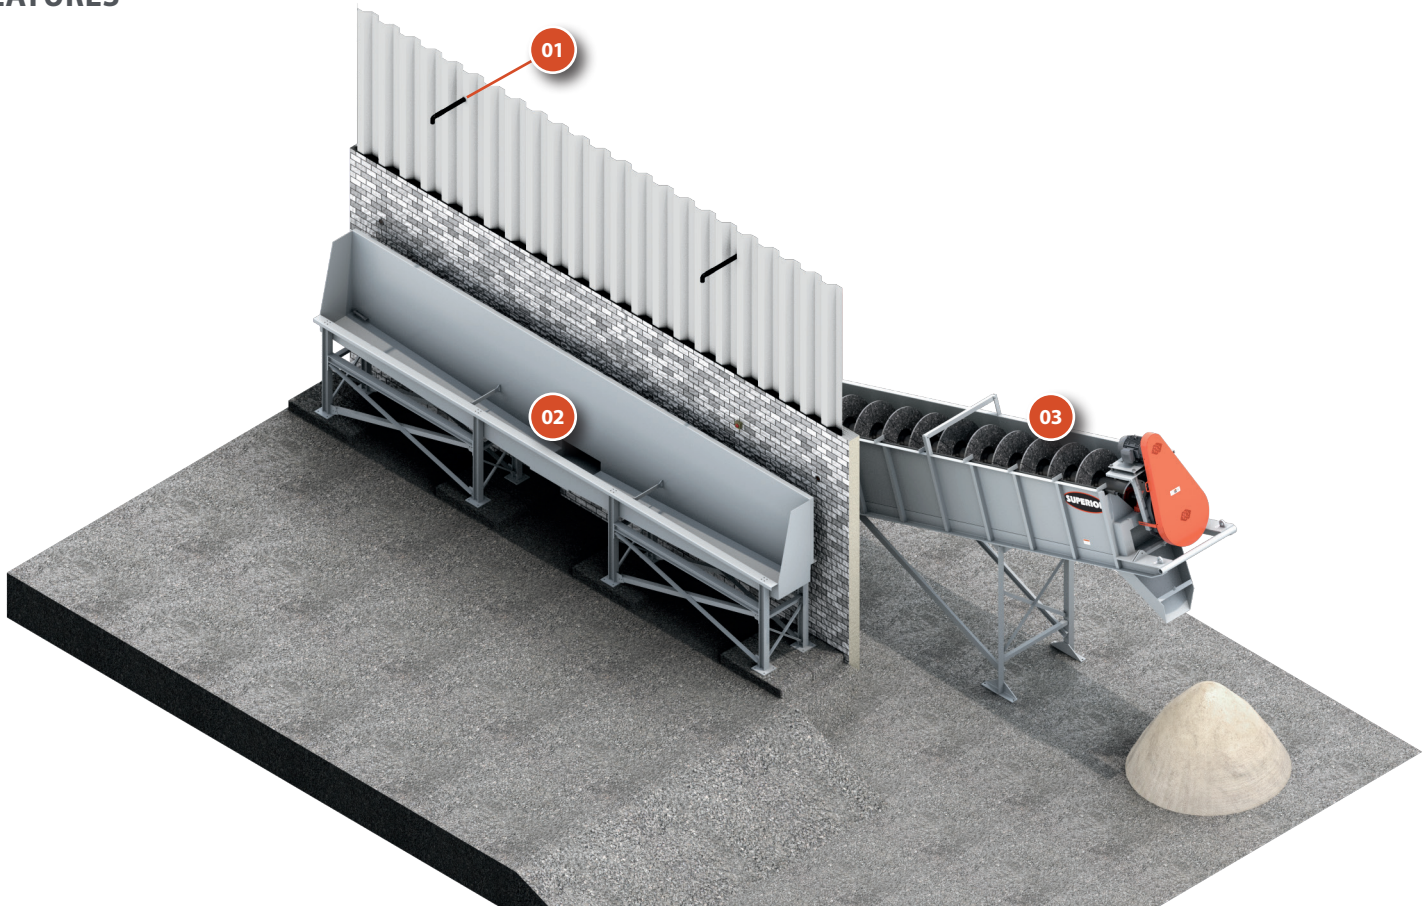

### 01/ WATER PUMP

Includes 4" (101mm) water pumps, hoses and motor. Designed for front or rear truck hopper.

### 02/ CLEANOUT HOPPER

Front or rear discharge configurations to accommodate 2-4 trucks at one time.

### 03/ FINE MATERIAL WASHER

Scrubs away any cement to produce reusable aggregate material at up to 2.2 yd/min (2.0 m/min).

## CONCRETE WASHOUT SYSTEM SPECIFICATIONS

Screw Size in x ft (mmx)	Processing Time yrd/min (m/min)	Screw Speed RPM	Motor Size HP (kW)	Length ft (m)	Estimated Empty Weight lbs (kg)	Screw Diameter inch (mm)
<b>GENERAL</b>						
36" x 25' (915 x 8)	1.2 (1.0)	20	15 (11.0)	25' (8.0)	10,800 (4,900)	36" (915)
44" x 32' (1,120 x 10)	2.2 (2.0)	17	20 (15.0)	32' (10.0)	16,800 (7,620)	44" (1,120)