



# JUMP CONVEYORS

Workhorse Transfer Conveyors Are Easily Customized For Your Operation



Rock Face to Load Out™



## FEATURES

### OPERATION

- » Radial Receiving Hopper
- » 6-foot (1.8m) Discharge Support
- » Belt Scale


### MAINTENANCE

- » Exterra® Primary Belt Cleaner
- » Moxie® Rolls
- » Urathon® Return Rolls
- » Impact Rolls
- » Auto Greaser


### MOBILITY

- » Power Travel
- » Strut Axle
- » Landing Gear
- » Fifth Wheel Hitch
- » Lights and Brakes
- » Tow Eye

## SPECIFICATIONS

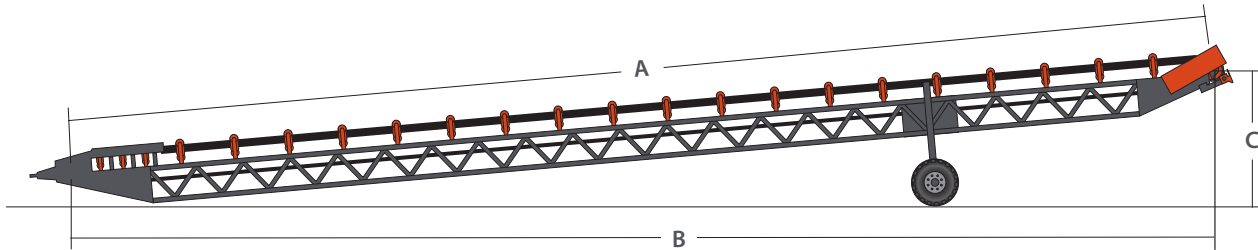

	40'		50'		60'		80'		100'	
	ft x in	m	ft x in	m	ft x in	m	ft x in	m	ft x in	m
<b>OPERATING SPECIFICATIONS</b>										
(A) Conveyor Length	40'-0"	12.1	50'-0"	15.2	60'-0"	18.2	80'-0"	24.4	100'-0"	30.5
(B) Conveyor Ground Length	40'-3"	12.2	45'-10"	14.0	49'-4"	15.0	79'-9"	24.4	94'-9"	28.9
(C) Raised Height to Center of Pulley	11'-7"	3.5	12'-4"	3.7	13'-7"	4.1	12'-2"	3.7	11'-11"	3.6
Lowered Height to Center of Pulley	7'-4"	2.2	7'-10"	2.3	6'-11"	2.1	6'-10"	2.0	7'-9"	2.3

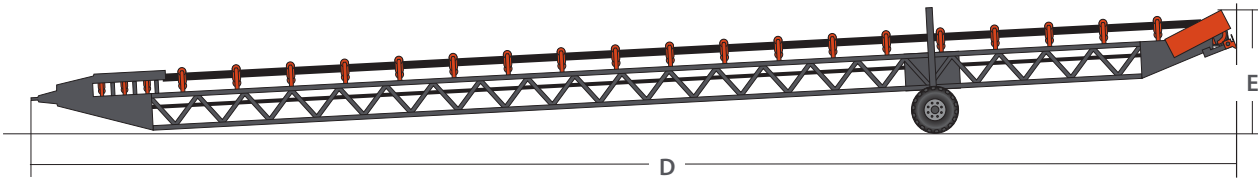

	40'		50'		60'		80'		100'	
	ft x in	m	ft x in	m	ft x in	m	ft x in	m	ft x in	m
<b>TRAVEL SPECIFICATIONS</b>										
(D) Travel Length - 36" Belt Width	44'-8"	13.6	54'-9"	16.7	64'-9"	19.8	84'-9"	25.9	71'-6"	21.7
(E) Travel Height - 36" Belt Width	8'-11"	2.7	8'-10"	2.6	9'-4"	2.8	9'-5"	2.8	14'-1"	4.2
Travel Width - 36" Belt Width	8'-6"	2.5	8'-0"	2.4	9'-3"; Dual 10'-1"	2.8; Dual 3.0	9'-1"	2.7	11'-11"; Dual 10'-5"	3.6; Dual 3.1
<b>WEIGHTS</b>										
	lbs	kg	lbs	kg	lbs	kg	lbs	kg	lbs	kg
Weight at Axle - 36" Belt Width	5,186	2,352	4,553	2,065	4,700	2,131	7,000	3,175	8,700	3,946
Weight at Kingpin - 36" Belt Width	1,463	663	1,910	866	2,400	1,088	3,000	1,360	2,900	1,315