



# RAZERLINK® MOBILE CONVEYORS

Highly Mobile Feed System Eliminate Double Handling of Material



TRACKS, DRIVE TIRES OR TOWABLE TIRES




FIXED, POWERFOLD OR TELESCOPING

Rock Face to Load Out™



# SPECIFICATIONS

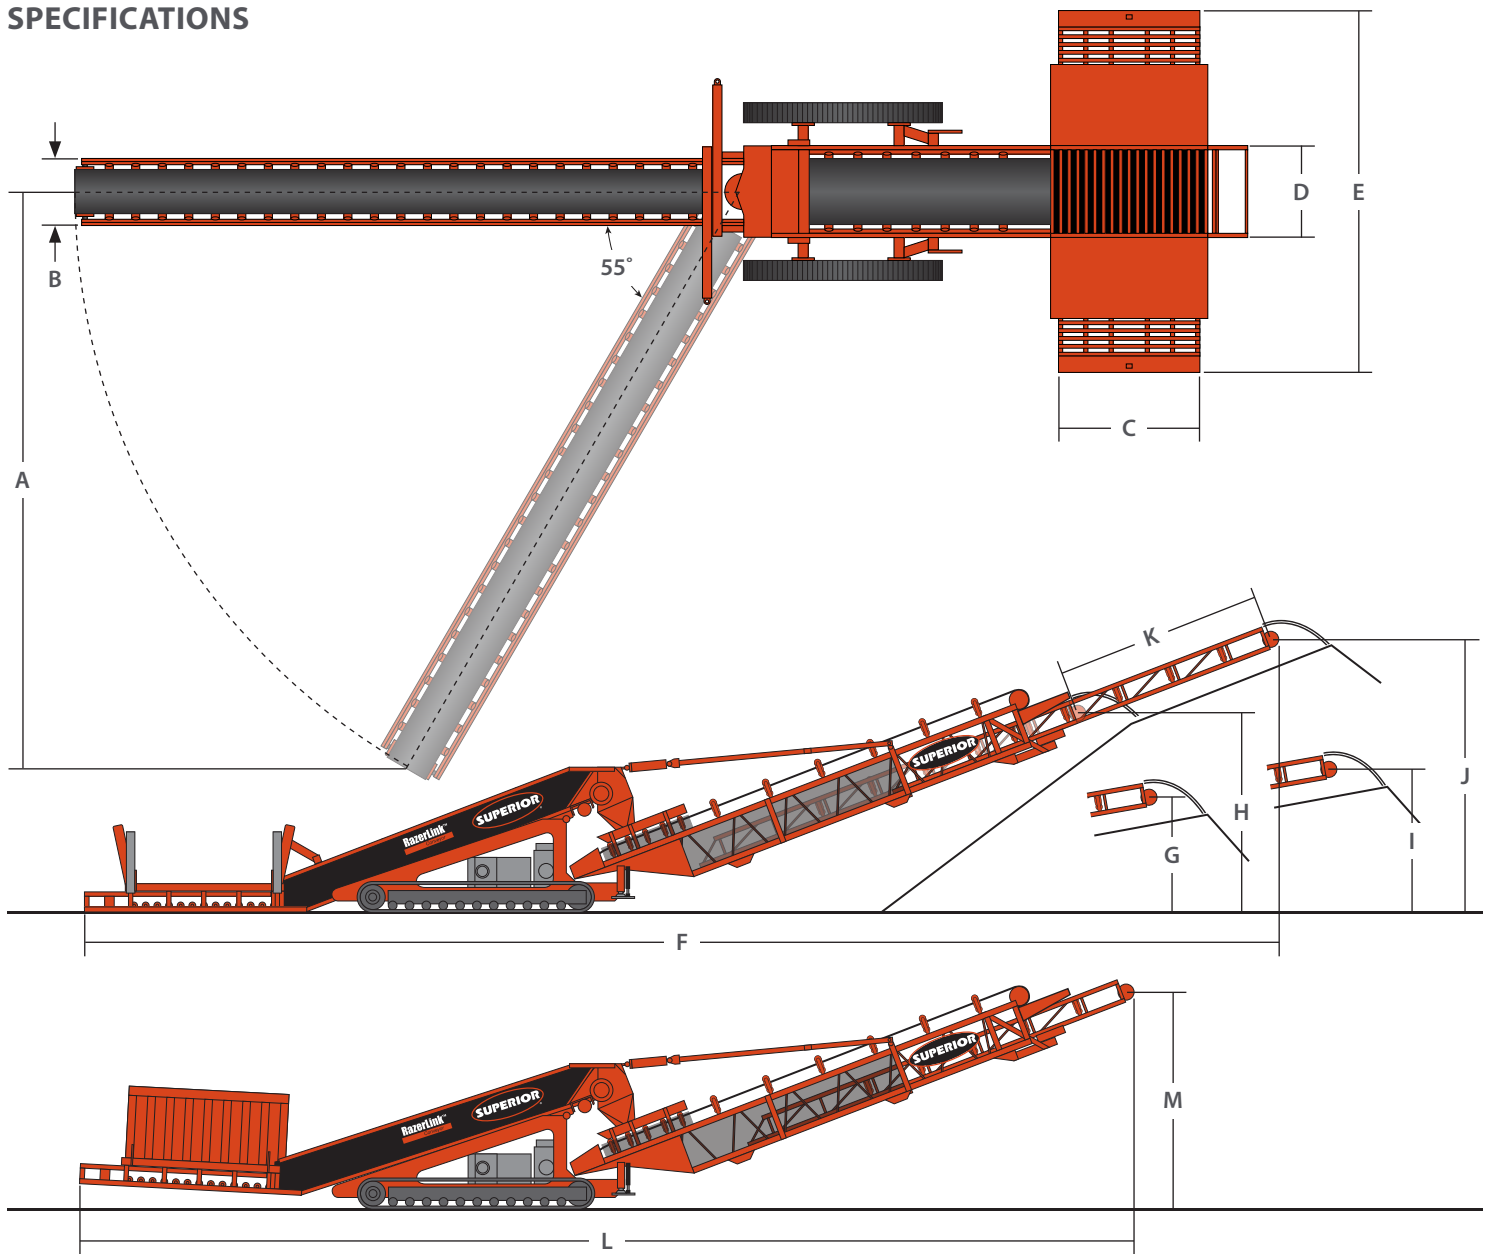

	48"		72"	
	ft x in	m	ft x in	m
<b>OPERATING SPECIFICATIONS</b>				
(A) Rotated Discharge Conveyor Distance	47'-2"	14.4	47'-2"	14.4
(B) Discharge Conveyor Width	6'-4"	2.0	7'-7"	2.3
(C) Load Ramp Width	11'-7"	3.5	11'-7"	3.5
(D) Main Conveyor Width	54"	1.3	66"	1.6
(E) Load Ramp Length	28'-8"	8.7	30'-4"	9.2
(F) Conveyor Length	94'-1"	28.7	94'-1"	28.7
(G) Lowered Height to Center of Pulley; Retracted	9'-0"	2.7	9'-0"	2.7
(H) Raised Height to Center of Pulley; Retracted	17'-8"	5.4	17'-8"	5.4
(I) Lowered Height to Center of Pulley; Extended	11'-2"	3.4	11'-2"	3.4
(J) Raised Height to Center of Pulley; Extended	22'-9"	6.9	22'-9"	6.9
(K) Discharge Conveyor Extension Length	18'-6"	5.6	18'-6"	5.6

<b>CAPACITY SPECIFICATIONS</b>	48"		72"	
	tph	stph	tph	stph
Tons Per Hour	1,000	1,360	1,000	1,360
	48"		72"	
	inch	mm	inch	mm

<b>CAPACITY SPECIFICATIONS</b>	48"		72"	
Maximum Material Size	5"	127	5"	127

<b>PIT TRAVEL SPECIFICATIONS</b>	48"		72"	
	ft x in	m	ft x in	m
(L) Length to Head Pulley Center	81'-5"	24.8	81'-5"	24.8
(M) Height to Head Pulley Center	17'-1"	5.2	17'-1"	5.2