



SLIDE-PAC™ CONVEYORS

Quickly and Safely Roll Conveyors From Transport to Operation Instead of Risky Lifting



Rock Face to Load Out™



HIGHLIGHTS




3 TRANSFER CONVEYORS IN A SINGLE LOAD



EASILY SLIDE CONVEYORS ON AND OFF


SPECIFICATIONS

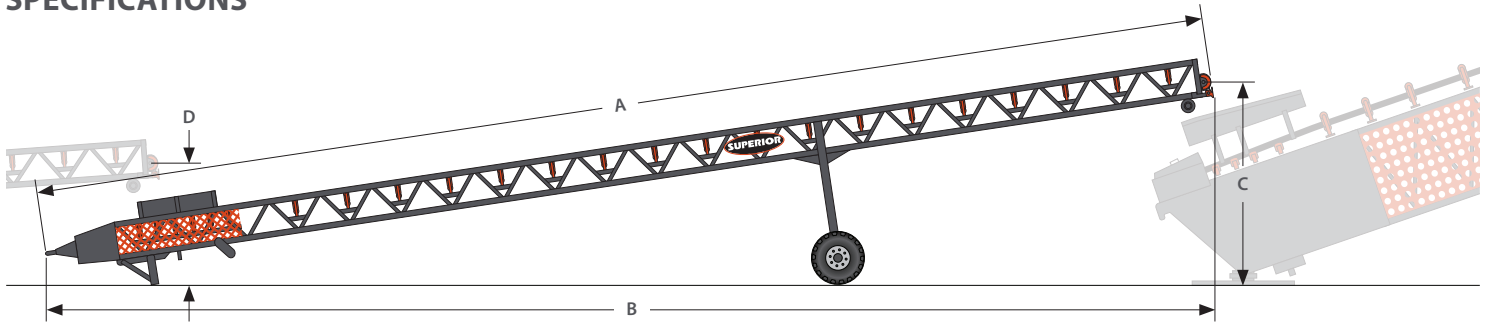

60'						70'						80'					
Top Unit		Middle Unit		Trailer Unit		Top Unit		Middle Unit		Trailer Unit		Top Unit		Middle Unit		Trailer Unit	
ft x in	m	ft x in	m	ft x in	m	ft x in	m	ft x in	m	ft x in	m	ft x in	m	ft x in	m	ft x in	m

OPERATING SPECIFICATIONS

(A) Conveyor Length (m)	59'-8"	18.2	59'-8"	18.2	59'-8"	18.2	69'-8"	21.2	69'-8"	21.2	69'-8"	21.2	79'-8"	24.2	79'-8"	24.2	79'-8"	24.2
(B) Conveyor Ground Length (m)	58'-9"	17.9	59'-6"	18.1	59'-7"	18.1	68'-11"	21.0	69'-3"	21.1	69'-6"	21.1	79'-1"	24.1	79'-4"	24.1	79'-8"	24.2
(C) Raised Height to Center of Pulley (m)	12'-9"	3.8	10'-2"	3.0	7'-3"	2.2	12'-10"	3.9	10'-4"	3.1	7'-0"	2.1	12'-3"	3.7	9'-11"	3.0	6'-10"	2.0
(D) Lowered Height to Center of Pulley (m)	7'-6"	2.2	7'-5"	2.2	6'-8"	2.0	7'-6"	2.2	7'-6"	2.2	6'-6"	1.9	7'-3"	2.2	7'-3"	2.2	6'-6"	2.0

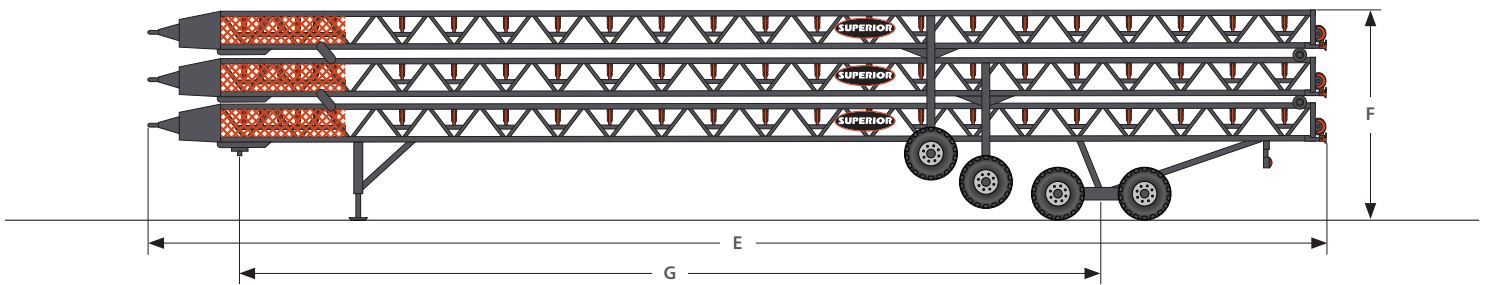

36" x 60'		36" x 70'		42" x 70'		36" x 80'	
ft x in	m	ft x in	m	ft x in	m	ft x in	m

TRANSPORT SPECIFICATIONS

(E) Travel Length	59'-0"	18.0	69'-0"	21.0	69'-0"	21.0	79'-0"	24.0
(F) Travel Height	13'-6"	4.1	13'-6"	4.1	13'-6"	4.1	13'-6"	4.1
Travel Width	10'-1"	3.0	9'-11"	3.0	10'-10"	3.3	9'-11"	3.0
(G) Kingpin to Axle	44'-9"	13.6	54'-9"	16.6	54'-9"	16.6	64'-9"	19.7

WEIGHTS

	lbs	kg	lbs	kg	lbs	kg	lbs	kg
Weight at Axle	18,945	8,593	21,000	9,525	24,300	11,022	22,044	9,998
Weight at Kingpin	10,018	4,544	12,800	5,805	15,600	7,076	13,871	6,291